


PIN 3,6,8,10 CUT OFF

UNIT : mm

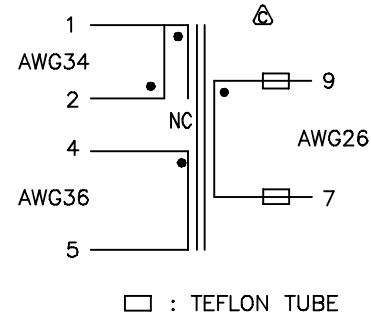

ELECTRICAL CHARACTERISTIC:

1. DCR : PIN 2-1 = 3.0Ω MAX.  
PIN 4-5 = 420mΩ MAX.  
PIN 9-7 = 45mΩ MAX.
2. INDUCTANCE (@100KHz ,1.0Vrms) :  
PIN 2-1 = 1354uH ±10%
3. LEAKAGE INDUCTANCE (@100KHz, 1.0Vrms) :  
PIN 2-1 (PIN 4-5,9-7 SHORT) = 54uH MAX.
4. TURN RATIO (@100KHz, 0.1Vrms)  
PIN 2-1 : 4-5 = 111 : 16 ±2%  
PIN 2-1 : 9-7 = 111 : 6 ±2%
5. HI-POT (@3000VAC, 3mA, 3SEC.) PIN 1.4- PIN 9
6. OPERATING TEMPERATURE : -40°C~+125°C
7. RoHS COMPLIANT

					<b>AOEM.</b>		TITLE POWER TRANSFORMER	
							DWG. NO. ATS-1322R	
RELEASE					UNITS:	SAFETY		SHEET 1 of 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW
REVISIONS								