


ELECTRICAL CHARACTERISTICS:

- 1 D.C.R. : PIN 1-3 = 40 ΩHM MAX. PIN 4-6 = 50 ΩHM MAX.
- 2 INDUCTANCE :(@1KHZ, 1Vrms) PIN 1-3 = 1.0H MIN.
- 3 IMPEDANCE :(@1KHZ,1Vrms, PIN 4-6 W/H 600 ΩHM) PIN 1-3 = 600 ΩHM +/-10%
- 4 INSERTION LOSS(@1KHZ,1Vrms, PIN 4-6 W/H 600 ΩHM)=0.8 dB MAX.
- 5 FREQ. RESP.(REF.1KHZ):@300HZ = +/-0.2dB  
@4KHZ = +/- 0.2dB
- 6 RETURN LOSS : (PIN 4-6 W/H 600 ΩHM, REF. 600 ΩHM)  
@300HZ = 26 dB MIN.  
@1KHZ = 26 dB MIN.  
@3400HZ = 25 dB MIN.
- 7 HI-POT(@1500VAC, 1mA, 1MINUTE): PRI-SEC-CORE
- 8 INSULATION RESISTANCE(@200 VDC) 1-4 = 100 MΩHM MIN.
- 9 RoHS COMPLIANCE

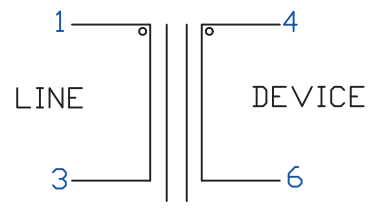

				<b>Atech</b> <sup>®</sup>		TITLE TRANSFORMER	
				Atech Technology Co., Ltd.		DWG. NO. ATS-040R	
				TEL:(02)2794-6667 FAX:(02)2794-8004			
				UNITS:	SAFETY		SHEET 1 OF 1
				DATE	P/N:		DRAW