



△ PIN 8,9 CUT OFF

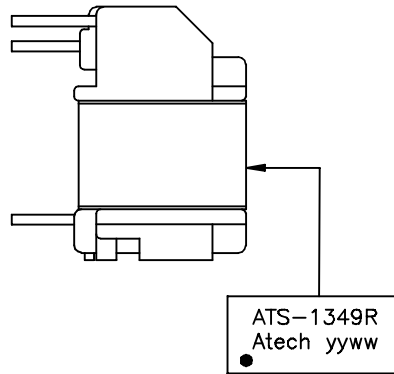

ELECTRICAL CHARACTERISTICS :

- △ 1. DCR : PIN 3-1.2 = 2.45Ω MAX.
PIN 4-5 = 160mΩ MAX.
PIN 7-6 = 80mΩ MAX.
- 2. INDUCTANCE (@10KHz, 1.0Vrms) :
PIN 3-1.2 = 2297uH ±10%
- 3. LEAKAGE INDUCTANCE (@100KHz, 1.0Vrms)
PIN 3-1.2 (PIN 4-5, 6-7 SHORT) = 92uH MAX.
- 4. TURN RATIO (@100KHz, 0.1Vrms) :
PIN 3-1.2 : 4-5 = 9.66 ±2%
PIN 3-1.2 : 7-6 = 9.66 ±2%
- 5. HI-POT (@3000VAC, 3mA, 3SEC) :
PIN 3.4 - PIN 7
- △ 6. OPERATING TEMPERATURE : +40°C~+85°C
- 7. RoHS COMPLIANT

Unit:mm

					AOEM.		TITLE POWER TRANSFORMER	
							DWG. NO. ATS-1349R	
RELEASE					UNITS:		SAFETY	
							SHEET 1 of 1	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW
REVISIONS								