


PIN 6.7.8.9.10 CUT OFF

DOT PIN#1
 ATS-1460R
 Atech yyww

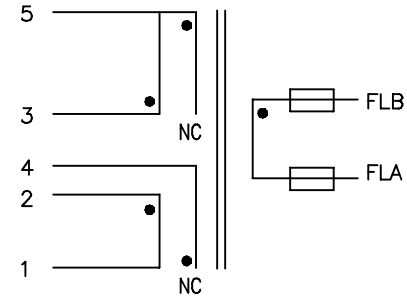

△ □ : TUBE TEFLON

ELECTRICAL CHARACTERISTICS :

1. DCR : PIN 3-5 = 1.3Ω MAX.
 PIN 1-2 = 300mΩ MAX.
 PIN FLA-FLB = 16mΩ MAX.
2. INDUCTANCE (@10kHz, 0.1Vrms) :
 PIN 3-5 = 957uH ±10%
3. LEAKAGE INDUCTANCE (@100kHz, 0.1Vrms) :
 PIN 3-5 (PIN 1-2,FLA-FLB SHORT) = 35uH MAX.
4. TURN RATIO : (@100kHz, 0.1Vrms) :
 PIN 3-5 : 2-1 = 4.55 ±2%
 PIN 3-5 : FLB-FLA = 18.2 ±2%
5. HI-POT : PIN 2.3.4 - PIN FLB-FLA (@3000VAC, 2mA, 2SEC)
6. RoHS COMPLIANT

UNIT:mm

								TITLE TRANSFORMER	
								DWG. NO. ATS-1460R	
RELEASE						UNITS:		SAFETY	
NO: DESCRIPTION						DATE		P/N:	
DATE						BY		DRAW	
DATE						CHK		SHEET 1 of 1	
DATE						APPD		DRAW	
REVISIONS									