


PIN 8,9,10 CUT OFF

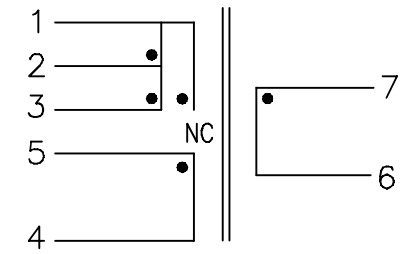

\* RoHS COMPLIANT

ELECTRICAL CHARACTERISTICS :

1. DCR : PIN 1-3 = 410mΩ MAX.  
PIN 4-5 = 22mΩ MAX.  
PIN 6-7 = 280mΩ MAX.
2. INDUCTANCE (@10kHz, 0.1Vrms) : PIN 3-1 = 694uH ±10%
3. LEAKAGE INDUCTANCE (@100kHz, 0.1Vrms) :  
PIN 3-1 (PIN 4-5, 6-7 SHORT) = 8uH MAX.
4. TURN RATIO (@100kHz, 0.1Vrms) :  
PIN 3-2 : 2-1 = 1.03 ±2%  
PIN 3-1 : 5-4 = 7.63 ±2%  
PIN 3-1 : 7-6 = 1.90 ±2%
5. HI-POT : PIN 1,5 - PIN 7 (@3000VAC, 3mA, 2SEC)
6. OPERATING TEMPERATURE : -40°C~+125°C

UNIT : mm

					<b>AOEM</b>		TITLE Flyback Transformer	
							DWG. NO. ATS-1565R	
RELEASE					UNITS:	SAFETY		SHEET 1 of 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW
REVISIONS								