


PIN 2,4,5,6,7,8,9,11 CUT OFF

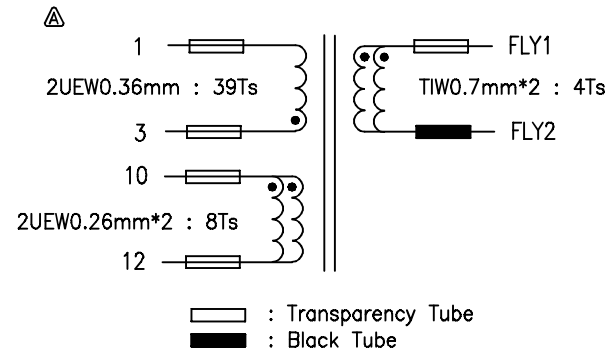

* RoHS COMPLIANCE
 △ CORE μ i : 2,500

ELECTRICAL CHARACTERISTICS :

- DCR : 3-1 = 260m Ω MAX.
 10-12 = 70m Ω MAX.
 FLY1-FLY2 = 8m Ω MAX.
- INDUCTANCE (@100kHz, 0.4Vrms)
 PIN 3-1 = 597uH \pm 5%
- LEAKAGE INDUCTANCE (@100kHz, 0.4Vrms, 12,10,FLY1,FLY2 SHORT)
 PIN 3-1 = 15uH MAX.
- TURNS RATIO (@10kHz, 1Vrms)
 PIN 3-1 : FLY1-FLY2 = 9.75 \pm 3%
 PIN 3-1 : 10-12 = 4.875 \pm 3%
- HI-POT (@3KVAC, 1mA, 1SEC) PIN1,3,10,12 - FLY1,FLY2
- RESONANT FREQUENCY :
 PIN 3-1 (ALL OTHER WINDINGS OPEN) : 1100kHz MIN.

								TITLE POWER TRANSFORMER	
								DWG. NO. ATS-1712R	
RELEASE						UNITES:		SAFETY	
NO: DESCRIPTION						DATE		P/N:	
BY						CHK		DRAW	
APPD						DATE		DRAW	
REVISIONS									