


Adapter A060212-TD2



Features

- Meet DoE Level VI
- High Reliability
- Application: Telecom, Set top box, modems, IT

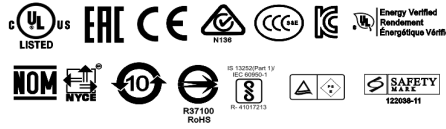

Characteristics

Output Wattage	60W	Load Regulation	±5%
Output Voltage	12V	Ripple & Noise	120mVp-p Max
Output Current	5A	Efficiency	88%min@115Vac/230Vac,DOE level VI
Input Voltage	100Vac~240Vac(90~264Vac min/max)	Surge	±1KV(L-N)±2KV(L-G,N-G),IEC 61000-4-5
Input Current	1.8A(RMS) max	EMI	CISPR 22 class B, FCC class B
Inrush Current	No damage	ESD	Air±8KV, Contact±4KV ,IEC 61000-4-2
Leakage Current(A)	<0.25mA@240Vac	MTBF	30000Hrs min., 100% load, 40°C (Telcordia SR-332, issue 2)
No Load Power Consumption	<0.15W@115Vac/230Vac		

Environmental

Operating Temperature	0°C ~ +40°C
Storage Temperature	0°C ~ +60°C
Humidity	5%~85%

Safety

UL/cUL/FCC/CB/CU/CE/PSB/CCC/BSMI/PSE/K-Mark/NOM/RCM/BIS

Dimension Diagram Unit:mm

