
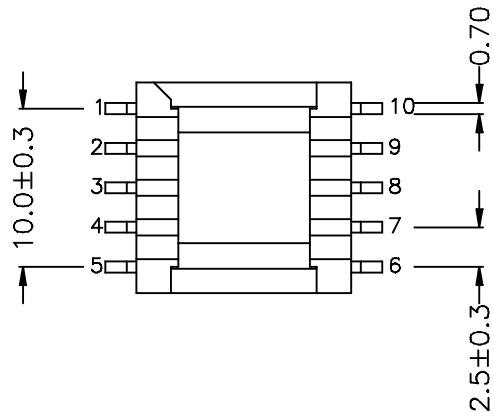


CUSTOMER TO DETERMINE LAND LAYOUT

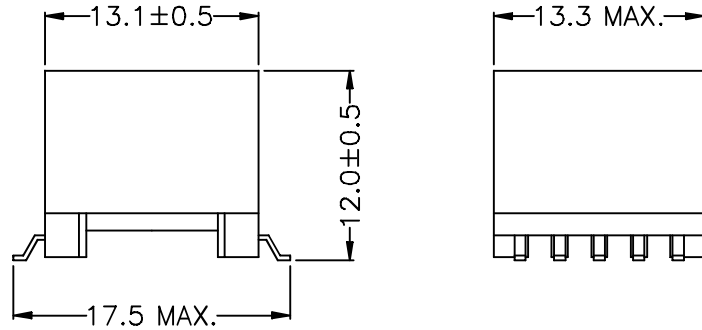

* RoHS COMPLIANT

ELECTRICAL CHARACTERISTICS : (32489R COMPATIBLE)

1. DCR : PIN 5-3 = 0.095Ω Max
PIN 2-1 = 0.17Ω Max
PIN 6-10 = 0.0275Ω Max
2. Inductance(@100KHz;100mVAC) : PIN 5-3 = 38uH ±10%
3. Leakage Inductance(@100KHz; 0.1Vrms)
PIN 5-3 (PIN1+2,6+10 SHORT) = 0.47uH MAX.
4. TURN RATIO(@10KHz, 0.1Vrms):
PIN (5-3) : PIN (6-10) = 2:1 ±1%
PIN (5-3) : PIN (2-1) = 1.82:1 ±1%
- △ 5. HI-POT
(1875VAC, 5mA, 1SEC) PIN 5-6 ; PIN(2+3) SHORT
(625VAC, 5mA, 1SEC) PIN (2-3)
6. OPERATING TEMPERATURE RANGE : -40°C~+125°C

							TITLE	
							TRANSFORMER	
							DWG. NO.	
							ATS-1250R	
					UNITS:		SAFETY	
RELEASE								
NO: DESCRIPTION					DATE		P/N:	
DATE							SHEET 1 of 1	
REVISIONS							DRAW	