


SUGGESTED P.C.B LAYOUT

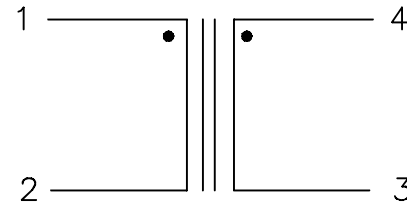

ELECTRICAL CHARACTERISTICS :

1. DCR : PIN 1-2 = 3.5Ω MAX.
PIN 4-3 = 3.5Ω MAX.
2. INDUCTANCE (@10KHz, 0.1Vrms) : PIN 1-2 = 32mH MIN.
3. RATED CURRENT : 0.25A
4. TURN RATIO (@100KHZ, 0.1Vrms) : PIN 1-2 : 4-3 = 1 ±1%
5. HI-POT : PIN 1-4 (@0.6KVAC, 6SEC, 0.5mA)
6. RoHS COMPLIANTE

						AOEM.		TITLE COMMON CHOKE	
								DWG. NO. ATS-1409R	
RELEASE						UNITS:		SAFETY	
NO:		DESCRIPTION		DATE	BY	CHK	APPD	DATE	P/N:
REVISIONS								SHEET 1 of 1	
								DRAW	