


SUGGESTED FOOTPRINT

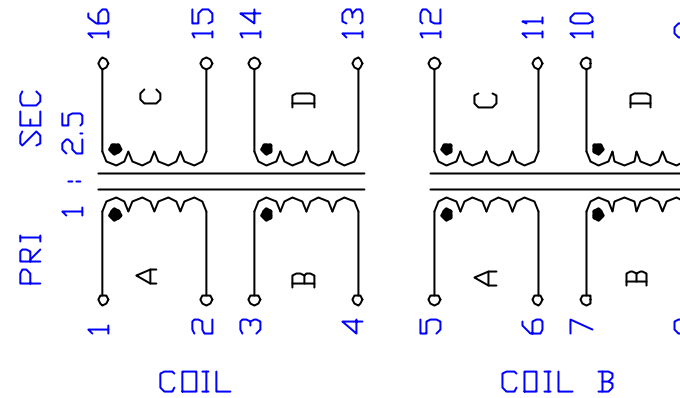

ELECTRICAL CHARACTERISTICS (ST5048 COMPATIBLE)

- D.C.R. : PRI. = 2.5 OHM MAX. SEC. = 6.2 OHM MAX.
- INDUCTANCE (< @10KHZ, 100mVrms) :
1-4 (< 2-3 SHORT) = 22mH MIN.
5-8 (< 6-7 SHORT) = 22mH MIN.
- LEACKAGE INDUCTANCE (< @100KHZ, 100mVrms) :
1-4 (< 2-3, 13-16, 14-15 SHORT) = 5uH MAX.
5-8 (< 6-7, 9-12, 10-11 SHORT) = 5uH MAX.
- INTERWINDING CAP. (< @100KHZ, 100mVrms) :
PRI. - SEC. = 80 pF MAX.
- TURNS RATIO (< @10KHZ, 100mVrms)
PRI : SEC = 1 : 2.5 +/-2%
- HI-POT (< 1500VAC, 1mA, 2SEC) : PRI. - SEC.

					 Atech Technology Co., Ltd. TEL (02)2704-6667 FAX (02)2704-8004		TITLE ISDN-S TRANSFORMER	
							DWG. NO. ATPL-086	
RELEASE	01/17/00	PAIR		SUEDY	UNITS: M/M	SAFETY		
NO	DESCRIPTION	DATE	BY	CHK	APPD			DATE
REVISIONS					01/17/00	SHEET 1 OF 1		
						DRAW Pair		