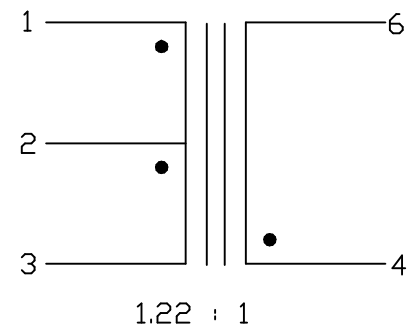

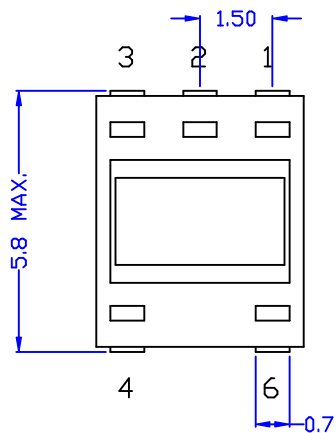


ELECTRICAL CHARACTERISTICS :

<FOR CX2081 COMPATIBLE>

1. IMPEDANCE RATIO : PIN 1-3 : PIN 4-6 = 1.5 : 1
2. INSERTION LOSS (@0dBm) : @5MHZ = 1.5dB MAX.
@60MHZ = 1.5dB MAX.
@125MHZ = 1.5dB MAX.
3. TURN RATIO (@1.5MHZ, 1Vrms) : PIN 1-3 : PIN 4-6 = 1.22 ± 5%
4. HI-POT (@1.5KVDC, 1mA, 2SEC) : PIN 1-4

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8084		TITLE RF TRANSFORMER	
								DWG. NO. ATPL-163	
	RELEASE	01/21/2002	DOLLY	JEFF	SUEDY			UNITS: M/M	SAFETY
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	DRAW <i>Pair</i>		
REVISIONS						01/21/02			