


ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN 5-8 = 4.8 OHM MAX.  
PIN 1-4 (PIN 2-3 SHORT) = 7.9 OHM MAX.
2. INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 1-4 (PIN 2-3 SHORT) = 13.3mH +/- 10%  
(@60mADC) : PIN 1-4 (PIN 2-3 SHORT) = 13.3mH +/- 10%
3. LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) : PIN 1-4 (PIN 2-3, PIN 5-8 SHORT) = 60uH MAX.
4. INTERWINDING CAP. (@10KHZ, 0.1Vrms) : PIN 1-5 (PIN 2-3 SHORT) = 60pF MAX.
5. TURN RATIO (@680KHZ, 0.1Vrms) : PIN 1-4 (PIN 2-3 SHORT) : PIN 5-8 = 1.6 +/- 2%
6. HI-POT (@2KVAC, 1mA, 2SEC) : PRI-SEC

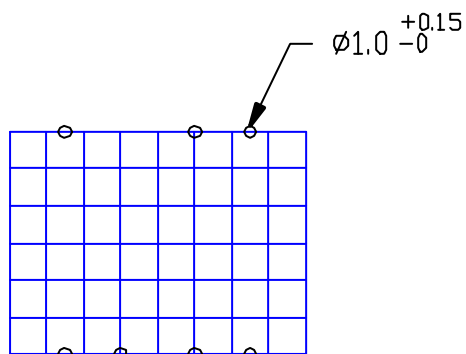

GRID 2.54\*2.54

						<b>Atech</b> <sup>®</sup>		TITLE ISDN-UK TRANSFORMER	
						Atech Technology Co., Ltd.		DWG. NO. ATS-475	
						TEL:(02)2794-8887 FAX:(02)2794-8884			
RELEASE	10/13/00	PAIR		SLUEDY	UNITS	SAFETY		SHEET 1 OF 1	
NO. DESCRIPTION	DATE	BY	CHK	APPD	M/M			DRAW	
REVISIONS					DATE	10/13/00		Pair	