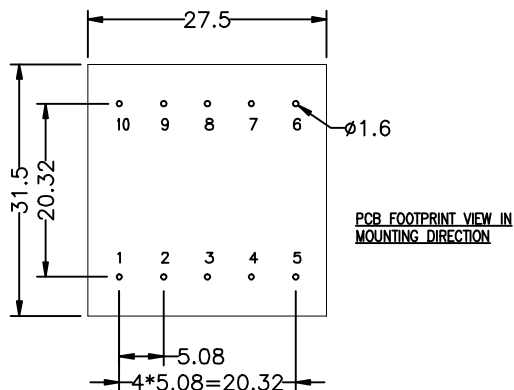
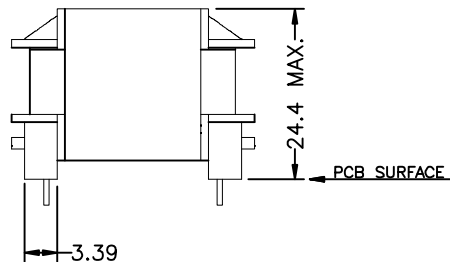

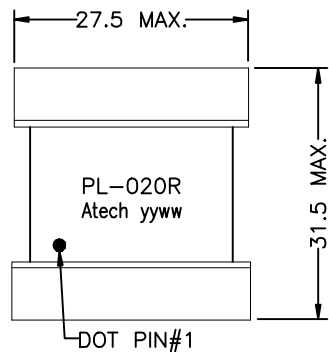


==== Dotted Lines Denote Tubing

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-2 = 20mΩ MAX.
PIN 3-4 = 930mΩ MAX.
PIN 6.7-8.9 = 20mΩ MAX.
- INDUCTANCE (@100KHz, 0.4Vrms)
PIN 3-4 = 712uH ±10%
- LEAKAGE INDUCTANCE (@100KHz, 0.4Vrms)
PIN 3-4 (PIN 1-2, PIN 6.7-8.9 SHORT) = 30uH MAX.
- TURN RATIO (@100KHz, 0.1Vrms)
PIN 3-4 : 6.7-8.9 = 9.6 ±1%
PIN 3-4 : 1-2 = 9.6 ±1%
- HI-POT (@3750VAC, 5mA, 2SEC) PIN 3-8.9
(@4250VDC, 5mA, 2SEC) PIN 3-8.9
- RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ±0.25mm

								TITLE PL TRANSFORMER	
								DWG. NO. PL-020R	
A	CHANGE DIM.	05/30/2011	SHIRLEY	MAY	MAY	UNITS: M/M		SAFETY	
	RELEASE	12/09/2010	SHIRLEY	RONAN	KING				
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE 12/09/10		P/N: DRAW SHIRLEY	
REVISIONS									