
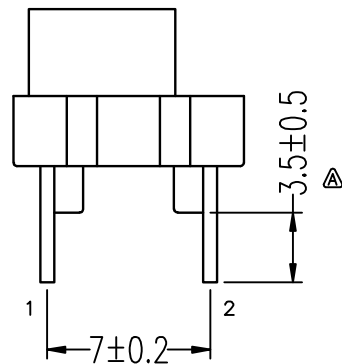



ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-4 = 60mΩ MAX.
PIN 3-2 = 80mΩ MAX.
- INDUCTANCE (@2MHz, 100mVrms) :
PIN 1-4 = 12.5uH ±15%
- TURN RATIO (@100KHz, 0.1Vrms) :
PIN 1-4 : 3-2 = 1 ±2%
- HI-POT (@3000VAC, 2mA, 1SEC) PIN 1-3
- RoHS COMPLIANT
- Leadwire Description :
Leadwire with internal winding parallel and then wrapped around the foot, not crossing each other at an angle between 45° and 90°. Diagram is as follows :



								TITLE Transformer	
								DWG. NO. PL-023R	
A	CHANGE DIM.	12/24/2012	SHIRLEY	RONAN	RONAN	UNITS: M/M		SAFETY	
	RELEASE	12/21/2011	SHIRLEY	RONAN	RONAN	DATE 12/21/11		SHEET 1 OF 1	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE 12/21/11		P/N:	DRAW Shirley
REVISIONS									

SHEET 1 of 1