
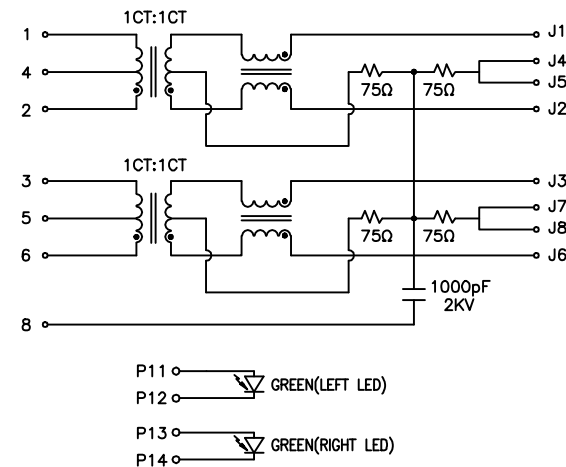


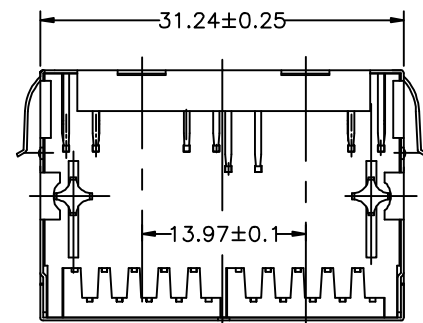

1. TURNS RATIO : TX/RX = 1CT : 1CT $\pm$ 3%.
2. HI-POT : 1500 Vrms.
3. OCL (@100KHz / 0.1Vrms, WITH 8MA DC BIAS) : 350uH MIN.
4. INSERTION LOSS (@0.1-100MHz) = -1.2 dB MAX.
5. RETURN LOSS : 1~30MHz = -18dB MIN.
30~60MHz = -14dB MIN.
60~80MHz = -12dB MIN.
6. CROSS TALK (@1-100MHz) = -30dB TYP.
7. CMRR (@0.1-100MHz) : -30dB TYP.
8. OPERATING TEMPERATURE RANGE : -40°C~+85°C
9. STORAGE TEMPERATIRE RANGE : -40°C~+85°C
10. PoE RATING : 30W, 720mA , 48V (FOR PoE+ PRODUCTS ONLY)
11. RoHS COMPLIANT

								TITLE RJ45 1*2 W/TRANSFORMER 10/100 W/LED FOR PoE+	
								DWG. NO. RJC-100R	
	RELEASE	02/04/2015	SHIRLEY	BETTY	BETTY	UNITS:	SAFETY		
						M/M			SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW	
REVISIONS						02/04/15			SHIRLEY