


ELECTRICAL CHARACTERISTICS: (FOR C1905 COMPATIBLE, MEET IEC950)

- D.C.R. : PIN 1-4 = PIN 2-5 = 0.4 OHM±10%
PIN 10-7 = 0.67 OHM±10% PIN 9-6 = 0.9 OHM±10%
- INDUCTANCE : (@10KHZ, 0.1Vrms) PIN 10-6(7-9 SHORT)= 440uH±5%
- LEAKGE INDUCTANCE : (@100KHZ, 0.1Vrms) PIN 10-6(7-9,2-4,1-5 SHORT)= 10uH MAX.
- TURNS RATIO : (@15KHZ, 1Vrms) 10-6 : 1-5 = 2±1% (W/H 2-4,7-9 SHORT)
- INSERTION LOSS(@772KHZ, 0dBm, 1-5 W/H 25 OHM) PIN 10-6(2-4,7-9 SHORT) = 1dB MAX.
- FREQ RESP. (@REF 772KHZ) @100KHZ = ±0.5dB
@1.1M HZ = ±0.5dB
- INTERWINDING CAP. (@10KHZ, 0.1Vrms) PIN 1-10(2-4,7-9 SHORT) = 35pF MAX.
- HI-POT (@ 1875VAC, 1mA, 2SEC) 1-10(2-4,7-9 SHORT)

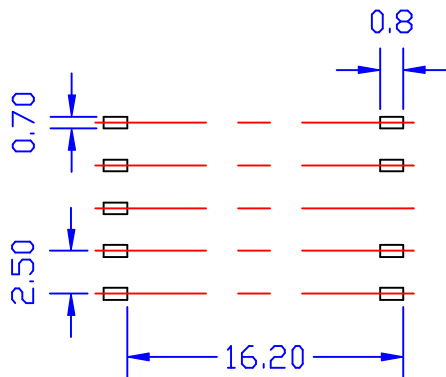

					 Atech Technology Co., Ltd. TEL:(02)2794-8867 FAX:(02)2794-8004		TITLE ADSL TRANSFORMER	
A MARKING							05/15/01	PAIR
RELEASE					02/12/01		SUEDY	UNITS: M/M SAFETY
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	SHEET 1 of 1	
REVISIONS							02/12/01	DRAW <i>Pair</i>