


ELECTRICAL CHARACTERISTICS :

1. MEET ANNEX E.2 OF ITU-T REC.G.992.1
2. DCR EACH LINE : 10 OHM MAX.
3. POTS 3dB CUTOFF FREQUENCY : 7KHZ TYP.
4. RIPPLE (@200-4KHZ) : ± 0.5 dB
5. INSERTION LOSS (@200-4KHZ) : 0.5dB MAX.
6. ATTENUATION (@8KHZ) : 14dB TYP. (@20KHZ&ABOVE) : 60dB TYP.
7. RETURN LOSS (@200-4KHZ,REF 600 OHM) : 20dB MIN.
8. LONGITUDINAL BALANCE (@200-4KHZ) : 53dB MIN.
9. COMMON MODE REJECTION (@40KHZ) : 55dB MIN. (@1.1MHZ) : 25dB MIN.
10. DELAY DISTORTION (@200-4KHZ) : 150 μ SEC MAX.
11. POTS LOOP CURRENTS : 120mA
12. POTS TIP TO RING DC VOLTAGE : 0-200V
13. POTS RINGING SIGNAL FROM 15.3HZ TO 68HZ : 150V_{rms}

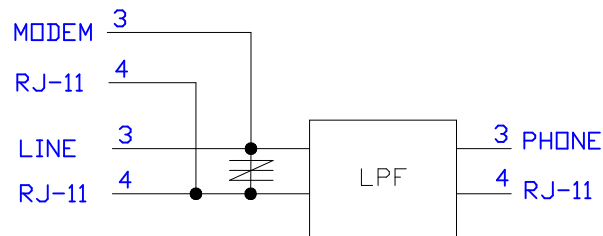

						 Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE ADSL POTS SPLITTER	
								DWG. NO. ATFF021	
B	ADD @	12/01/2005	BART	AL	SUEDY	UNITS: M/M		SAFETY	
A	ATTENUATION	03/12/01	PAIR		SUEDY	DATE		SHEET 1 OF 1	
	RELEASE	01/17/2001	PAIR		SUEDY	01/17/01		DRAW <i>Pair</i>	
NO.	DESCRIPTION	DATE	BY	CHK	APPD				
REVISIONS									